
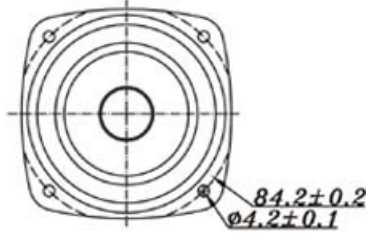


# F SERIES

# W3-926SD



3" PAPER FULL RANGE

- FULL RANGE FREQUENCY RESPONSE
- STAMPED STEEL BASKET
- ALUM. PHASE PLUG
- PP CONE WITH SANTOPRENE SURROUND
- NEODYMIUM MAGNET DESIGN
- MAGNETICALLY SHIELDED

|                      |                          |
|----------------------|--------------------------|
| DIAPHRAGM MTL        | Black PP                 |
| SURROUND MTL         | Pulux                    |
| NOMINAL IMPEDANCE    | 8 W                      |
| DCR IMPEDANCE        | 6 W                      |
| SENSITIVITY 1W/1m    | 87 dB                    |
| FREQUENCY RESPONSE   | 110-20K Hz               |
| FREE AIR RESONANCE   | 110 Hz                   |
| VOICE COIL DIAMETER  | 20.4 mm                  |
| AIR GAP HEIGHT       | 4 mm                     |
| RATED POWER INPUT    | 12 W                     |
| MAXIMUM POWER INPUT  | 25 W                     |
| FORCE FACTOR, BL     | 3.84 TM                  |
| MAGNET WEIGHT ( oz)  | Neodymium                |
| MOVING MASS          | 2 g                      |
| FERRO FLUID ENHANCED | No                       |
| SUSPENSION COMPL.    | 1302 $\mu\text{MN}^{-1}$ |
| EFFEC.PISTON AREA    | 0.0032 $\text{M}^2$      |
| Levc                 | 0.067 mH                 |
| Zo                   | 70 ohm                   |
| X-max                | 0.75 mm                  |
| Vas                  | 1.89 Liter.              |
| Qts                  | 0.46                     |
| Qms                  | 5.38                     |
| Qes                  | 0.50                     |



VOICE: 886.2.26570282 FAX: 886.2.26580166  
E-MAIL: info@tb-speaker.com

**CLOSE**