



### CDX20-3000

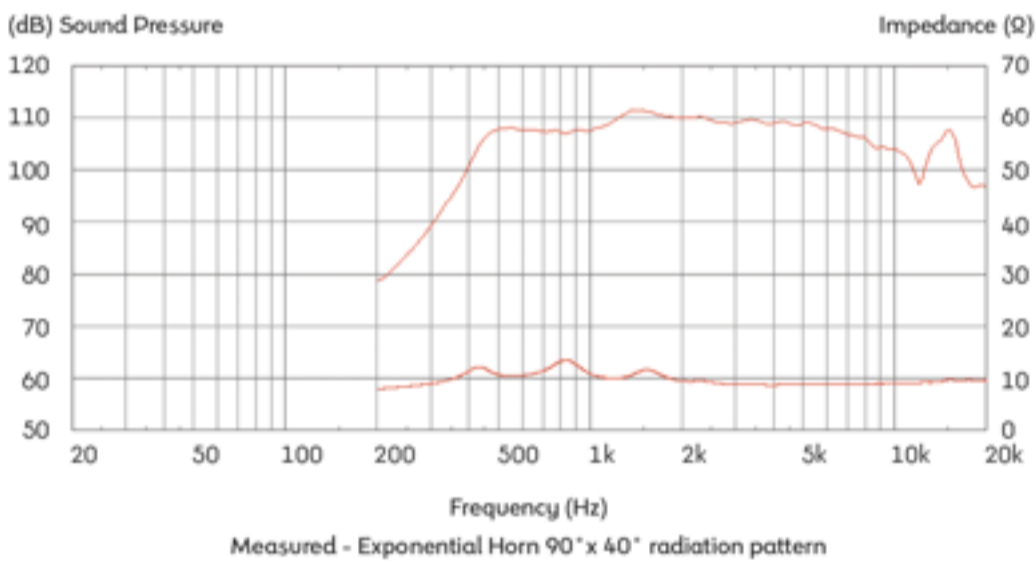

- 800Hz recommended min. crossover freq (12dB/oct)
- Maximum modal suppression phase plug
- Deep-drawn titanium diaphragm with polyimide surround

#### 8 Frequency Response

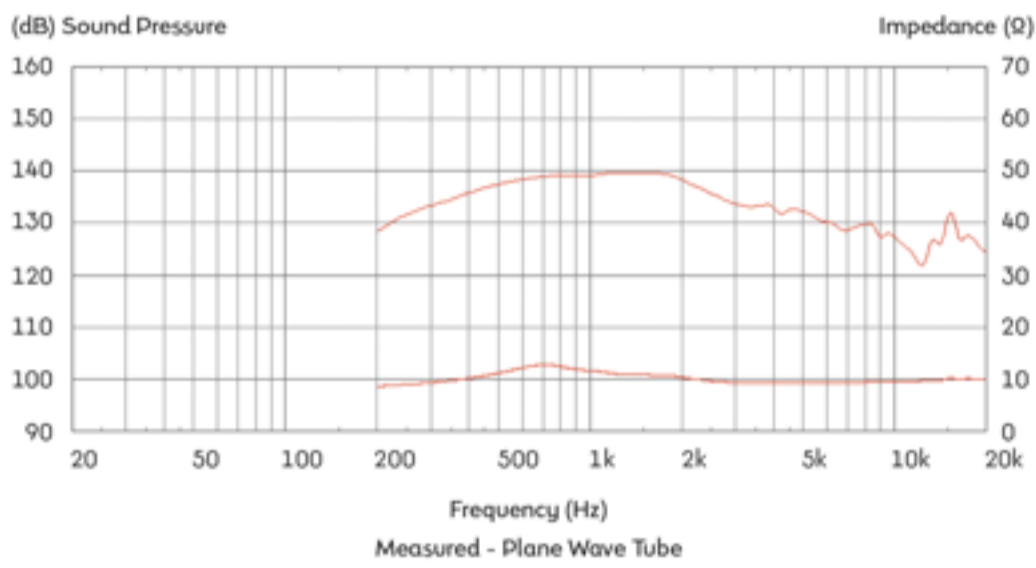

1. Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.
2. Continuous Power Rating is defined as 3dB greater than the AES rating
3. Measured on axis at 1W, 1m, using typical horn, in 2Ā anechoic environment.

#### General Specifications

Power rating <sup>1</sup>	75Wrms
Continuous power rating <sup>2</sup>	150W
Nominal impedance	8
Sensitivity <sup>3</sup>	107dB
Frequency range	500-20,000Hz
Recommended min. crossover (12dB/oct)	800Hz
Voice coil diameter	75mm/3in
Voice coil material	Edgewound copper clad aluminium
Magnet type	Neodymium
Diaphragm material	Titanium
Surround material	Polyimide

#### Mounting Information

Maximum width	125mm/5.0in
Depth	94mm/3.7in
Weight	2.0kg/4.4lb
Fitting	Flange (4 x M6 holes on 102mm /4in PCD)
Throat exit	50.0mm/2in

#### Packed Dimensions & Weight

Single pack size W x D x H	140mm x 135mm x 112mm /5.5in x 5.3in x 4.4in
Single pack weight	2.4kg/5.3lb
Multi pack size W x D x H	500mm x 365mm x 145mm /19.7in x 14.4in x 5.7in
Multi pack weight	13.5kg/29.7lb